



AGAVE WIRE LTD

Distributed By:



Toll-Free (800) 690-3408

An ISO 9001 Certified Quality Management System

Fax: (469) 547-4242

PRODUCT DATA SHEET

PRODUCT OVERVIEW:

ATHW-0807

Allstar Part# 1308B1

CONSTRUCTION: One 8 AWG Stranded Copper PVC Insulated Conductor

APPROVALS: UL - Thermoplastic Wire

APPLICATION: TYPE THW

CONSTRUCTION PARAMETERS:

CONDUCTOR: 8 AWG Annealed Bare Copper

STRANDING: 7 (ASTM B-8)

NUMBER OF CONDUCTORS: 1


INSULATION MATERIAL: PVC

INSULATION THICKNESS: 0.045" Nominal

COPPER O.D.: 0.148" Nominal

FINISHED O.D.: 0.239" Nominal

WEIGHT PER 1000ft: 72-lbs/1000'

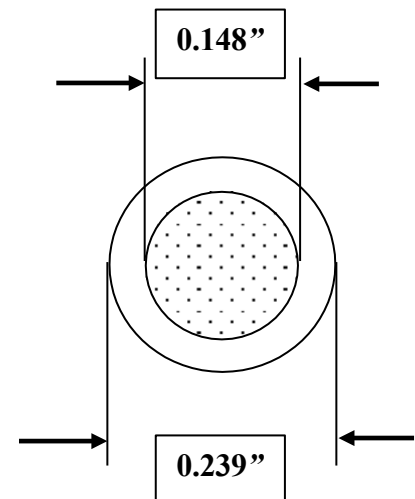

ELECTRICAL & ENVIRONMENTAL PROPERTIES:

TEMPERATURE RATING: -20°c to 75°c

OPERATING VOLTAGE: 600v

INSULATION COLOR: Various Colors Available



PRINT LEGEND:

“8 AWG TYPE THW (UL) 75°C 600 VOLTS VW-1 E197269”

On special orders, the customer will accept all mil lengths and +/- 10% of total order requested. The information presented here is, to the best of our knowledge, is true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise. This specification is proprietary intellectual property of Agave Wire. Any information contained herein shall not be disclosed to any party without written consent of Agave Wire.

Manufactured in the U.S.A

P.O. Box 38409 · 10355 Sanden Drive · Dallas, TX 75238 · 214.503.2576 · Fax 469.547.4242 · www.agavewire.com