


**Category 5E UTP  
350MHz  
Plenum Enhanced**

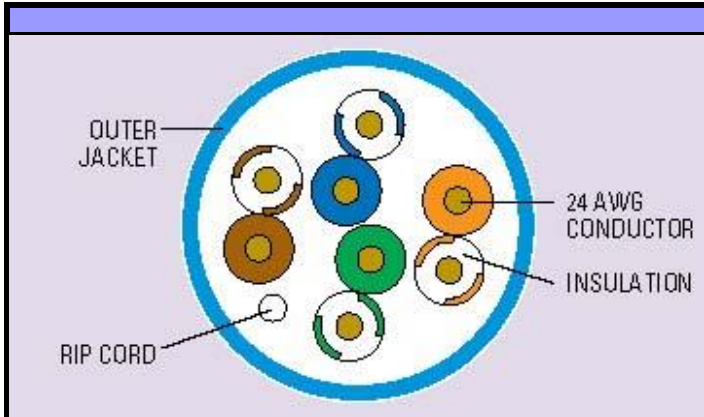

**Description**

**24 AWG Cat 5E Plenum, High Performance Data Cable**

**Applicable Standards**

- UL Listed Type CMP
- C(UL) listed FT6
- UL Verified to TIA - 568-C.2, and ISO/IEC 11801
- ROHS Compliant
- ATM 155 Mbps
- Ethernet 10BASE-T, 100BASE-TX, 100BASE-VG, 100BASE-T4,
- 1000 Mbps 1000BASE-T Gigabit Ethernet™ (IEEE 802.3)
- 16 Mbps Token Ring™ (IEEE 802.5)

**Physical Characteristics**

Number of Conductor Pairs	4
Size	24 AWG
Stranding	Solid
Conductor Material	Solid Annealed Bare Copper
Shield Material	Unshielded
Rip Cord	Yes
Insulation Material	Polymer Alloy (FEP)
Insulation Overall Diameter	0.035 in. ± 0.0002 in.
Insulation Average Thickness	0.0078 in.
Jacket	Flame Retardant PVC
Outer Jacket Average Wall Thickness	0.019 in.
Outer Jacket Nom. O.D.	0.200 in. ± 0.008 in.
Nominal Weight	21 lbs

**Mechanical Characteristics**

Temperature Rating	Installation	0 to + 60°C
	Operating	-20°C to + 75°C
Tensile Strength	Before	> = 13.8 Mpa
	Aging	> = 100%
Elongation	Before	> = 100%
	Aging	> = 100%
Aging Condition	100°C x 240 hours	> = 85% of unaged
	After	> = 50% of unaged

**Color Code**

Pair 1	White/Blue	Blue
Pair 2	White/Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

**Cable Marking**

XXXXXX CATEGORY 5E 350MHZ 24AWG 4PR UTP CMP 75C FT6  
C(UL)US VERIFIED (ETL) ANSI/TIA-568-C.2 \*\*\*\*FT

**Electrical Performance**

Frequency (MHz)	Attenuation (dB/100m)		Return loss (dB)		NEXT (dB)		PS-NEXT (dB)	
	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
0.772	1.8	1.5	23.0	33.0	72.0	81.1	70.0	78.7
1	2.0	1.8	23.0	38.6	70.3	79.4	68.3	76.9
4	4.1	3.6	23.0	39.8	61.2	69.9	59.3	67.4
8	5.8	5.1	24.5	38.2	56.8	61.9	54.8	59.4
10	6.5	5.8	25.0	38.0	55.3	62.4	53.5	59.9
16	8.2	7.4	25.0	37.4	52.3	57.8	50.3	55.2
20	9.3	8.2	25.0	36.8	50.8	56.4	48.8	53.8
25	10.4	9.3	24.3	35.2	49.3	56.3	47.3	53.6
31.25	11.7	10.5	23.6	33.3	47.9	53.8	45.9	51.1
62.5	17.0	14.9	21.5	32.2	43.4	49.8	41.4	47.4
100	22.0	19.2	20.1	31.3	40.3	47.5	38.3	45.0
155	28.1	24.2	18.8	29.8	37.4	45.1	35.4	42.6
200	32.4	27.3	18.0	28.5	35.7	43.3	33.7	40.2
250	38.9	30.9	17.5	27.3	34.8	41.4	32.5	39.0
300	41.0	34.1	16.8	25.6	33.1	40.2	31.1	37.7
350	44.9	37.8	16.3	23.2	32.1	39.0	30.1	36.5

Frequency (MHz)	ELFEXT (dB)		PS-ELFEXT (dB)		ACR (dB)		PS-ACR (dB)	
	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
0.772	66.0	73.3	63.0	72.7	70.2	79.2	68.2	77.0
1	63.8	71.3	60.8	70.6	68.2	77.6	66.3	75.0
4	51.7	59.4	48.7	58.7	57.2	66.3	55.2	63.5
8	45.7	53.2	42.7	51.1	51.0	59.8	49.0	56.9
10	43.8	50.5	40.8	49.7	48.8	56.6	47.0	53.7
16	39.7	47.0	36.7	45.1	43.0	53.0	42.1	47.4
20	39.7	45.0	34.7	43.6	41.5	50.5	39.5	45.0
25	35.8	43.3	32.8	42.0	38.9	47.0	36.9	43.7
31.25	33.9	41.3	30.9	40.5	36.5	43.3	34.2	40.0
62.5	27.8	35.8	24.8	34.5	26.4	35.0	24.4	31.2
100	23.8	31.3	20.8	30.3	18.3	26.2	16.3	24.2
155	19.9	27.5	16.9	26.9	10.0	20.9	7.3	15.9
200	17.7	24.7	14.7	24.5	5.0	16.0	2.0	10.0
250	17.1	22.2	14.0	22.5	0.0	10.6	-	4.0
300	16.7	20.5	13.5	20.7	-	6.1	-	-1.3
350	16.0	19.4	12.8	19.6	-	1.2	-	-6.4

\* Values above 100MHz are information only

**Electrical Characteristics**

Maximum Conductor DC Resistance @ 20°C	9.38 Ω / 100 Meters
Maximum DC Resistance Unbalanced @ 20°C	5%
Maximum Pair-to-Pair Ground Capacitance Unbalanced	330 pF / 100 Meters
Characteristic Impedance (1 ~ 350 MHz)	100 ± 15 Ω
Mutual Capacitance	5.6 nF / 100 Meters
Maximum Delay Skew	40 ns / 100 Meters

**Part Numbers**

Part Numbers	Color	Put up	Part Numbers	Color	Put up
5E04UPBL4	Blue	1,000' Reelex II	5E04UPBL3	Blue	1,000' RIB
5E04UPGN4	Green	1,000' Reelex II	5E04UPGN3	Green	1,000' RIB
5E04UPGY4	Grey	1,000' Reelex II	5E04UPGY3	Grey	1,000' RIB
5E04UPOR4	Orange	1,000' Reelex II	5E04UPOR3	Orange	1,000' RIB
5E04UPWH4	White	1,000' Reelex II	5E04UPWH3	White	1,000' RIB
5E04UPYL4	Yellow	1,000' Reelex II	5E04UPYL3	Yellow	1,000' RIB
5E04UPBK4	Black	1,000' Reelex II			